




18-20 JEEP WRANGLER JL/JLU

TRAMP STAMP INSTALLATION INSTRUCTIONS

JLTS

Thanks for purchasing a Reaper Off-Road spare tire delete plate for your 18+ Jeep Wrangler JL. Our team has worked to ensure that this product is the premium in performance, quality, and fitment. We are proud to say that this product will enhance the look and off-road performance of your vehicle. We encourage you to read through the following steps, and check the included Bill of Materials before beginning. Please follow these steps to ensure that your installation goes as planned.

Our products are specifically designed with ease of installation in mind. However, if you are uncomfortable with the following instructions please seek professional assistance. Reaper Off-Road will not be held liable for harm or injury to yourself or your vehicle during installation or use of this product.

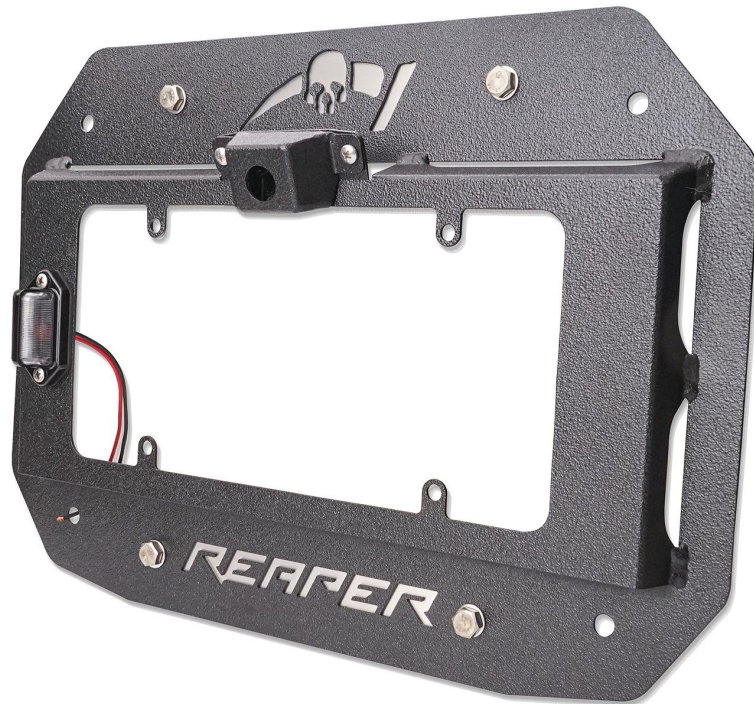

Recommended Tool List



- Metric socket set
- Inch socket set
- Ratchet
- Allen wrench set - inch
- Torx tool set
- Screwdriver set
- Plastic trim removal tools

R1007
V01 - 10.28.19



Visit us online:
ReaperOffRoad.com

Call Us Toll-Free:
844-868-3022

 [reaper.off.road](https://www.instagram.com/reaper.off.road)
 [Reaper-Off-Road](https://www.facebook.com/Reaper-Off-Road)

DISASSEMBLY

1. Remove camera cover. Use a T40 Torx to turn the screw to unlock position. Slide the cover off.
2. Remove (3) Lug nuts - 22 mm socket.
3. Remove tire from carrier.
4. Remove the cover from the 3rd brake light arm - (7) T25 screws.
5. Remove the 3rd brake light - (2) T25 screws.
6. Unplug 3rd brake light.
7. Remove (8) bolts holding the carrier using a 13MM socket.
8. Remove (2) T25 screws on carrier from left and right side of camera.
9. Remove (3) T8 screws to remove camera from mount.
10. Unplug wiring from back of camera.
11. Clean the mounting surface.

18+ JEEP WRANGLER JL/JLU

TRAMP STAMP

PAGE 2



Detail 1: Remove camera cover



Detail 5: Remove 3rd brake light



Detail 9: Remove rear camera from mount

R1007
V01 - 10.28.19

ASSEMBLY

18+ JEEP WRANGLER JL/JLU

TRAMP STAMP

PAGE 3

12. The logo backing plates can be customized to a color of your choice. If you choose to paint them, please do so in advance and allow proper dry time.
13. We recommend wiring the license plate light to the OEM license plate light wiring. You will need additional wiring and you will use the connection method of your choice.
14. For a clean wire routing, we recommend running all wiring behind the plastic panel on inside of the tail gate. Use trim removal tools to pry off the panel.
15. Locate the sleeve near the tail gate door hinges. Run wiring through the sleeve with the other wires and along the inside of the tail gate towards the handle side.
16. Install camera to tramp stamp - (3) screws. (A)
17. Install camera cover - (2) screws (B).
18. Install your license plate into the frame and secure with (4) ¼-20 screws (D), washers (F) and nuts (I).
19. Install license plate light to tramp stamp - (2) screws (C) and nuts. (H)
20. Connect wiring for license plate light and plug in the rear camera.
21. Install the tramp stamp assembly to the vehicle, using (8) bolts (E) and washers (G). Make sure to position the accent plates behind the logos.
22. Reinstall any other trim that was removed during installation.



Detail 14: Remove plastic panel



Detail 22: Installation complete

R1007
V01 - 10.28.19